## DEVELOPMENT SCHEDULE (UNDER APPROVED PLANNING APPLICATION NO. A/K20/122)

PACKAGE 23A & 23B

SITE AREA
PACKAGE 23A = 84,109 s.m.
PACKAGE 23B = 6,467 s.m.
TOTAL = 90,576 s.m.

GREEN COVERAGE DISTRIBUTION
PERMITTED = 56,884 s.m. #
PROPOSED = 56,406.902 s.m.

PACKAGE 23A (ZONE O1)

BUILDING HEIGHT
PERMITTED = 3-STOREYS #
PROPOSED = RDE 1-3 2 STOREYS
= RDE 1-4 1 STOREY
= RDE 1-5 1 STOREY
= FREESPACE 3 STOREYS
= ~~TOILET 1~~ 1-~~STOREY~~
= TOILET 2 1 STOREY
= TOILET 3 1 STOREY
= PARK OFFICE 1 STOREY
= PARK STORAGE 1 STOREY
= PARK PLANT ROOM 1 STOREY
= CAR PARK UNDERNEATH THE PARK 3 STOREYS

NON-DOMESTIC FOOTPRINT
PERMITTED FOOTPRINT = 10,894 s.m. #
PROPOSED SITE COVERAGE =

| | | | |
|---|---|---|---|
| GENERAL LAYOUT & EVA | = | 0.000 s.m. | (REFER SEPARATE SUBMISSION: BD 4075/14(P)) |
| RDE 1-3, RDE 1-4 & RDE 1-5 | = | 1847.774 s.m. | |
| TOILET 3 | = | 40.196 s.m. | |
| FREESPACE | = | 3088.668 s.m. | THIS SUBMISSION |
| CAR PARK UNDERNEATH THE PARK | = | 51.790 s.m. | (REFER SEPARATE SUBMISSION: BD 4043/14(P)) |
| PARK MANAGEMENT OFFICE, PUBLIC TOILETS AND ANCILLARY PARK FACILITIES | = | 0.000 s.m. | (REFER SEPARATE SUBMISSION: BD 4004/15(P)) |
| TOTAL | = | 5028.428 s.m. | |

NON-DOMESTIC SITE COVERAGE FOR RDE (PHASE 1)
PERMITTED = 1,888 s.m.
PROPOSED = 1,847.774 s.m. (THIS SUBMISSION)

NON-DOMESTIC GROSS FLOOR AREA
PERMITTED = 8,134 s.m. #
PROPOSED =

| | | | |
|---|---|---|---|
| GENERAL LAYOUT & EVA | = | 0.000 s.m. | (REFER SEPARATE SUBMISSION: BD 4075/14(P)) |
| RDE 1-3, RDE 1-4 & RDE 1-5 | = | 1924.700 s.m. | |
| TOILET 3 | = | 40.196 s.m. | |
| FREESPACE | = | 4424.087 s.m. | THIS SUBMISSION |
| CAR PARK UNDERNEATH THE PARK | = | 0.000 s.m. | (REFER SEPARATE SUBMISSION: BD 4043/14(P)) |
| PARK MANAGEMENT OFFICE, PUBLIC TOILETS AND ANCILLARY PARK FACILITIES | = | 0.000 s.m. | (REFER SEPARATE SUBMISSION: BD 4004/15(P)) |
| TOTAL | = | 6388.983 s.m. | |

NON-DOMESTIC GROSS FLOOR AREA FOR ARTS & CULTURAL FACILITIES
PERMITTED = 4,484 s.m. #
PROPOSED = 4,424.087 s.m. (REFER SEPARATE SUBMISSION: BD 4062/14(P))

NON-DOMESTIC GROSS FLOOR AREA FOR RETAIL / RESTAURANT
PERMITTED = 3,650 s.m. #
PROPOSED = 1,924.700 s.m.

NON-DOMESTIC GROSS FLOOR AREA FOR RDE (PHASE 1)
PERMITTED = 2,100 s.m.
PROPOSED = 1,924.700 s.m.

LOADING/UNLOADING PROVISION
(BREAKDOWN REFER TO TABLE 3 BELOW)

CARPARK PROVISION
(BREAKDOWN REFER TO TABLE 1 & TABLE 2 BELOW)

PACKAGE 23B (ZONE O1)
NON-DOMESTIC FOOTPRINT
PERMITTED FOOTPRINT = 745 s.m. #
PROPOSED SITE COVERAGE = 744.516 s.m. (ARTS PAVILION, REFER SEPARATE SUBMISSION REF: BD 2/4027/14)

NON-DOMESTIC GROSS FLOOR AREA FOR ARTS & CULTURAL FACILITIES
PERMITTED = 1,000 s.m. #
PROPOSED = 877.191 s.m. (ARTS PAVILION, REFER SEPARATE SUBMISSION REF: BD 2/4027/14)

PACKAGE 24A (ZONE O1)

SITE AREA
PACKAGE 24A = 31,248 s.m.

NON-DOMESTIC FOOTPRINT
PERMITTED FOOTPRINT = 0 s.m. #
PROPOSED SITE COVERAGE = 0 s.m.

NON-DOMESTIC GROSS FLOOR AREA
PERMITTED = 0 s.m. #
PROPOSED = 0 s.m.

GREEN COVERAGE DISTRIBUTION
REQUIRED = 11,311 s.m.
PROPOSED = 11,108.210 s.m.

PACKAGE 24B (ZONE O1)

SITE AREA
PACKAGE 24B = 20,220 s.m.

NON-DOMESTIC FOOTPRINT
PERMITTED FOOTPRINT = 0 s.m. #
PROPOSED SITE COVERAGE = 0 s.m.

NON-DOMESTIC GROSS FLOOR AREA
REQUIRED = ~~3,685~~ s.m. #
PROPOSED = 0 s.m.

GREEN COVERAGE DISTRIBUTION
REQUIRED = 2,930 s.m. #
PROPOSED = ~~3,611~~ 3,611 s.m.

\# DATE EXTRACTED FROM MASTER REGISTER APPROVED BY BUILDING AUTHORITY ON 31 AUGUST 2017 DWG NO. P00-A-CP001 REV. K

## DEVELOPMENT SCHEDULE (UNDER BUILDINGS ORDINANCE)

SITE AREA
PACKAGE 23A = 84,109 s.m.
PACKAGE 23B = 6,467 s.m.
PACKAGE 24A = 31,248 s.m.
TOTAL = 121,824 s.m.

SITE CLASSIFICATION
SITE CLASSIFICATION = A

NON-DOMESTIC SITE COVERAGE (NOT EXCEEDING 15M)
PERMITTED = 100%
PROPOSED =

| | | | |
|---|---|---|---|
| GENERAL LAYOUT & EVA | = | 3365.103 s.m. | (REFER SEPARATE SUBMISSION: BD 4075/14(P)) |
| RDE 1-3, RDE 1-4 & RDE 1-5 | | | |
| TOILET 3 | | | |
| FREESPACE | = | 3088.668 s.m. | THIS SUBMISSION |
| CAR PARK UNDERNEATH THE PARK | = | 51.790 s.m. | (REFER SEPARATE SUBMISSION: BD 4043/14(P)) |
| PARK MANAGEMENT OFFICE, PUBLIC TOILETS AND ANCILLARY PARK FACILITIES | = | 931.523 s.m. | (REFER SEPARATE SUBMISSION: BD 4004/15(P)) |
| ARTS PAVILION | = | 744.516 s.m. | (REFER SEPARATE SUBMISSION: BD 2/4027/14) |
| TOTAL | = | 8181.600 s.m. / 121,824 s.m. | |
| | = | 6.716% | |

NON-DOMESTIC PLOT RATIO
PERMITTED = 5
PROPOSED =

| | | | |
|---|---|---|---|
| GENERAL LAYOUT & EVA | = | 3173.541 s.m. | (REFER SEPARATE SUBMISSION: BD 4075/14(P)) |
| RDE 1-3, RDE 1-4 & RDE 1-5 | | | |
| TOILET 3 | | | |
| FREESPACE | = | 4424.087 s.m. | THIS SUBMISSION |
| CAR PARK UNDERNEATH THE PARK | = | 0.000 s.m. | (REFER SEPARATE SUBMISSION: BD 4043/14(P)) |
| PARK MANAGEMENT OFFICE, PUBLIC TOILETS AND ANCILLARY PARK FACILITIES | = | 833.240 s.m. | (REFER SEPARATE SUBMISSION: BD 4004/15(P)) |
| ARTS PAVILION | = | 877.191 s.m. | (REFER SEPARATE SUBMISSION: BD 2/4027/14) |
| TOTAL | = | 9308.059 s.m. / 121,824 s.m. | |
| | = | 0.076 | |

SITE AREA
PACKAGE 24B = 20,220 s.m.

NON-DOMESTIC SITE COVERAGE (NOT EXCEEDING 15M)
PERMITTED = 100%
PROPOSED =

| | | | |
|---|---|---|---|
| GENERAL LAYOUT & EVA | = | 39.250 s.m. | |
| TOTAL | = | 39.250 s.m. / 20,220 s.m. | |
| | = | 0.194% | |

SITE AREA
PACKAGE 22 = 33,268 s.m.

NON-DOMESTIC SITE COVERAGE (NOT EXCEEDING 15M)
PERMITTED = 100%
PROPOSED =

| | | | |
|---|---|---|---|
| WATER METER CABINET | = | 83.860 s.m. | |
| COVERED WITH SHELTER | | | |
| TOTAL | = | 83.860 s.m. / 33,268 s.m. | |
| | = | 0.252% | |

### TOTAL NON-DOMESTIC U.F.S. CALCULATION

| | | |
|---|---|---|
| G/F + Kitchen (33.233m²) | = | 1446.688m² |
| 1/F | = | 772.947m² |
| 2/F | = | 213.090m² |
| Grand total | | 2432.725m² |

TABLE 1: CAR PARKING & MOTORCYCLE PARKING PROVISION CALCULATIONS

| PACKAGE | PARCEL | VENUE / LANDSCAPE | USE | NO. OF SEAT | GFA (m²) | FACTOR | CAR PARKING REQ | CAR PARKING PRO | MOTORCYCLE PARKING FACTOR | MOTORCYCLE PARKING REQ | MOTORCYCLE PARKING PRO | REMARKS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 23A & 23B | 50 | PHASE 1 RDE | RDE | - | 1,925 | 1 SPACE FOR EVERY 300 SQM | 7 | 98 0.* | 7.36% OF THE TOTAL PROVISION FOR PRIVATE CARS | 7 | 9 0.* | (THIS SUBMISSION) |
| | | OUTDOOR STAGE | CACF | 5000 | - | LOW MODEL SPLIT PA 1 SPACE FOR 66.14 SEATS OR PART THEREOF + 1 STAFF PARKING | 77 | | | | 0.* | (THIS SUBMISSION) |
| | | CARPARK UNDERNEATH THE PARK | | | - | | - | | | | 9 | (REFER SEPARATE SUBMISSION BD 4027/14(P)) |
| | 51 | FREESPACE | CACF | 450 | 4,424.087 | LOW MODEL SPLIT PA 1 SPACE FOR 66.14 SEATS OR PART THEREOF + 4 STAFF PARKING | 11 | 209 0.* | | 1 | 9 0.* | (REFER SEPARATE SUBMISSION BD 4027/14(P)) |
| | 52 | M+ PAVILION | CACF | - | 877.191 | 1 SPACE FOR EVERY 435.15 SQM | 3 | 0.* | | 1 | 0.* | (REFER SEPARATE SUBMISSION BD 4027/14(P)) |

NOTE:
1 * THE SHORT FALL OF 98 NOS. OF CAR PARKING SPACES & 8 NOS. MOTOCYCLE PARKING SPACES SHALL BE PROVIDED IN THE CARPARK UNDERNEATH THE PARK IN PACKAGE 23B PARCEL 50.

TABLE 2: COACH PARKING PROVISION CALCULATIONS

| PACKAGE | PARCEL | VENUE / LANDSCAPE | USE | NO. OF SEAT | GFA (m²) | MODEL SPLIT BY COACH 7% | FACTOR | COACH PARKING REQ | COACH PARKING PRO | REMARKS |
|---|---|---|---|---|---|---|---|---|---|---|
| 23A & 23B | 50 | OUTDOOR STAGE | CACF | 5000 | - | 350 | 1 SPACE FOR EVERY 140 HOURLY PASSENGERS | 3 4 | 0.* 0 | (THIS SUBMISSION) |
| | 51 | FREESPACE | CACF | 450 | 4,424.087 | 32 | 1 SPACE FOR EVERY 140 HOURLY PASSENGERS | 1 | 0.* | (REFER SEPARATE SUBMISSION BD 4062/14(P)) |

NOTE:
2 * THE SHORT FALL OF 4 NO. OF COACH PARKING SPACES SHALL BE PROVIDED IN THE WEST LAY-BY

TABLE 3: LOADING / UNLOADING PROVISION CALCULATIONS

| PACKAGE | PARCEL | VENUE / LANDSCAPE | USE | NO. OF SEAT | GFA (m²) | FACTOR | LOADING / UNLOADING REQ | LOADING / UNLOADING PRO | REMARKS |
|---|---|---|---|---|---|---|---|---|---|
| 23A & 23B | 50 | PHASE 1 RDE | RDE | - | 1,925 | 1 SPACE FOR EVERY 1200 SQM | 2 5 | 2 5 | (THIS SUBMISSION) |
| | | OUTDOOR STAGE | CACF | 5000 | - | | - | - | (THIS SUBMISSION) |
| | 51 | FREESPACE | CACF | 450 | 4,424.087 | (REFER TO NOTE 3) | 2 | 2 | (REFER SEPARATE SUBMISSION BD 4062/14(P)) |
| | 52 | M+ PAVILION | CACF | - | 877.191 | 1 SPACE FOR EVERY 3000 SQM | 1 | 1 | (REFER SEPARATE SUBMISSION BD 4027/14(P)) |

NOTE:
3 ACF REQUIREMENT IS REFERENCED FROM TABLE 10.2 OF THE TRAFFIC OPERATION PLAN FOR THE WEST KOWLOON CULTURAL DISTRICT DISCUSSION NOTE ON CAR PARKING, COACH PARKING AND LOADING / UNLOADING CALCULATION (JUNE 2017)
4 L/UL PROVISION FOR GACF, OFFICE AND RDE IS DIVIDED INTO 60% LGV AND 30% HGV IS REFERENCED FROM TABLE 9.4 OF THE TRAFFIC OPERATION PLAN FOR THE WEST KOWLOON CULTURAL DISTRICT DISCUSSION NOTE ON CAR PARKING, COACH PARKING AND LOADING / UNLOADING CALCULATION (JUNE 2017)

TABLE 4: CAR PICK UP AND DROP OFF AND TAXI DROP OFF PROVISION CALCULATIONS

| PACKAGE | PARCEL | VENUE / LANDSCAPE | USE | NO. OF SEAT | GFA (m²) | MODEL SPLIT BY PRIVATE CAR 6% | MODEL SPLIT BY TAXI 9% | FACTOR | CAR PU/DO & TAXI DO LAY-BY REQ | CAR PU/DO & TAXI DO LAY-BY PRO | REMARKS |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 23A & 23B | 50 | PHASE 1 RDE | RDE | - | 1,925 | | | 1 PU/DO LAY-BY FOR TAXIS AND PRIVATE CARS FOR EVERY 20000 SQM | 0.* | 4 | (THIS SUBMISSION) |
| | | OUTDOOR STAGE | CACF | 5000 | - | 400 | 450 | 1 PU/DO LAY-BY FOR TAXIS AND PRIVATE CARS FOR EVERY 303 HOURLY PRIVATE CAR / TAXI PASSENGERS | 3 4 | 4 | (THIS SUBMISSION) |
| | 51 | FREESPACE | CACF | 450 | 4,424.087 | 36 | 41 | 1 PU/DO LAY-BY FOR TAXIS AND PRIVATE CARS FOR EVERY 303 HOURLY PRIVATE CAR / TAXI PASSENGERS | 1 | 0.* | (REFER SEPARATE SUBMISSION BD 4062/14(P)) |

NOTE:
5 * THE SHORT FALL OF CAR PICK UP AND DROP OFF AND TAXI PICK UP LAY-BY SHALL BE PROVIDED IN THE PARK IN PACKAGE 23B PARCEL 50.
6 * PU/DO LAY-BY FOR ZONE 4 RDE (P43A, P50, P33 AND P56) WILL BE ALLOCATED TO THE PARCEL WITH HIGHEST GFA, WHICH WILL BE P43A ACCORDING TO TABLE 7.5 OF THE TRAFFIC OPERATION PLAN FOR THE WEST KOWLOON CULTURAL DISTRICT DISCUSSION NOTE ON CAR PARKING, COACH PARKING AND LOADING / UNLOADING CALCULATION (JUNE 2017)

TABLE 5: TAXI PICK UP PROVISION CALCULATIONS


| PACKAGE | PARCEL | VENUE / LANDSCAPE | USE | NO. OF SEAT | GFA (m²) | MODEL SPLIT BY TAXI 9% | FACTOR | TAXI PU LAY-BY REQ | TAXI PU LAY-BY PRO | REMARKS |
|---|---|---|---|---|---|---|---|---|---|---|
| 23A & 23B | 50 | OUTDOOR STAGE | CACF | 5000 | - | 450 | 1 TAXI PU FOR EVERY 252 HOURLY TAXI PASSENGERS | 2 3 | 3 3 | (THIS SUBMISSION) |
| | 51 | FREESPACE | CACF | 450 | 4,424.087 | 41 | 1 TAXI PU FOR EVERY 252 HOURLY TAXI PASSENGERS | 1 | 0.* | (REFER SEPARATE SUBMISSION BD 4062/14(P)) |


NOTE:
7 * THE SHORT FALL OF TAXI PICK UP LAY-BY SHALL BE PROVIDED IN THE PARK IN PACKAGE 23B PARCEL 50.

TABLE 6: COACH PICK UP AND DROP OFF PROVISION CALCULATIONS

| PACKAGE | PARCEL | VENUE / LANDSCAPE | USE | NO. OF SEAT | GFA (m²) | MODEL SPLIT BY COACH 7% | FACTOR | COACH PU/DO BAY REQ | COACH PU/DO BAY PRO | REMARKS |
|---|---|---|---|---|---|---|---|---|---|---|
| 23A & 23B | 50 | OUTDOOR STAGE | CACF | 5000 | - | 350 | 1 SPACE FOR EVERY 140 HOURLY COACH PASSENGERS | 3 4 | 4 4 | (THIS SUBMISSION) |
| | 51 | FREESPACE | CACF | 450 | 4,424.087 | 32 | 1 SPACE FOR EVERY 140 HOURLY COACH PASSENGERS | 1 | 0.* | (REFER SEPARATE SUBMISSION BD 4062/14(P)) |

NOTE:
8 * THE SHORT FALL OF COACH PICK UP AND DROP OFF BAY SHALL BE PROVIDED IN THE PARK IN PACKAGE 23B PARCEL 50.

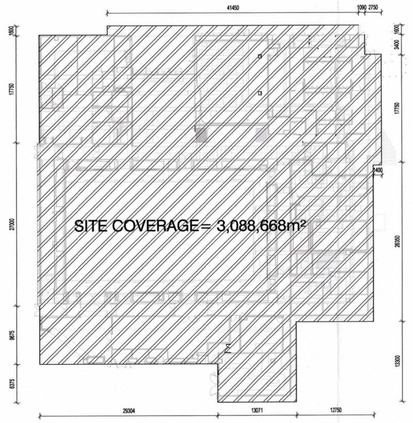

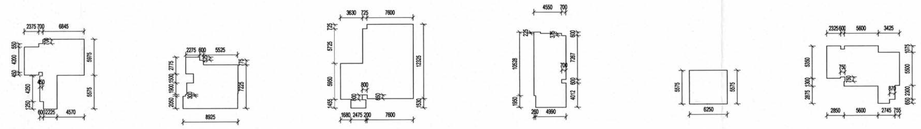
U.F.A. DIAGRAMS OF NON-ESSENTIAL PLANT ROOM FOR CONCESSION

CHILLER PUMP ROOM AREA DIAGRAM
AREA OF CHILLER PUMP ROOM = 70.286m²


A.H.U. ROOM 4 AREA DIAGRAM
AREA OF A.H.U. ROOM 4 = 63.244m²

A.H.U. ROOM 3 AREA DIAGRAM
AREA OF A.H.U. ROOM 3 = 126.709m²

A.H.U. ROOM 2 AREA DIAGRAM
AREA OF A.H.U. ROOM 2 = 63.382m²

A.H.U. ROOM 1 AREA DIAGRAM
AREA OF A.H.U. ROOM 1 = 34.533m²

D.C.S PLANT ROOM AREA DIAGRAM
AREA OF A.H.U. ROOM 1 = 78.788m²





T.B.E. ROOM AREA DIAGRAM
AREA OF T.B.E. PLANT ROOM = 24.310m²
T.B.E. ROOM AREA REQUIRED = 22m² < 24.310m² <28m²




R.S.M.R.C. AREA DIAGRAM
AREA OF R.S.M.R.C. ROOM = 5.870m²

R.S.M.R.C. AREA CALCULATION
TOTAL NON-DOMESTIC U.F.S. = 2432.73 m² (SAME AS U.F.A.)
R.S.M.R.C. AREA REQUIRED:
2432.73m² / 925 = 2.63m² < 5.870m² (PROVIDED)

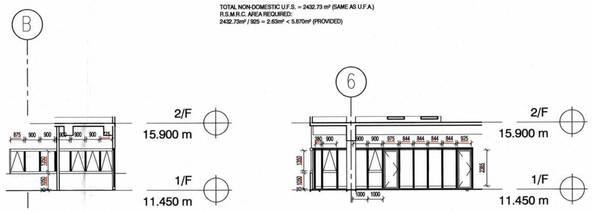


NATURAL LIGHTING & VENTILATION CALCULATION FOR OFFICE

U.F.A. OF OFFICE = 122.006m²
WINDOW AREA REQUIRED FOR GLAZED PORTION= 122.006 ÷ 10 = 12.201m²
WINDOW AREA REQUIRED FOR OPENABLE PORTION = 122.006 ÷ 18 = 7.626m²


* CALCULATION ON ACTUAL PROVISION TO BE SUPPLEMENTED IN FINAL AMENDMENT

WINDOW AREA PROVIDED FOR GLAZED PORTION=0.844 x 2.385 x 4
0.9 x (1.500+1.850) x 2 +0.9 x 2.385 x 2 + 0.38 x 2.385
0.775 x 1.35 + 0.9 x 1.20 x 5 + 0.875 x 1.35
=25.87m²>12.201m²(OK)

WINDOW AREA PROVIDED FOR OPENABLE PORTION = 0.9 x 1.20 x 4 + 0.775 x 1.35 + 0.875 x 1.35
0.925 x 2.385 + 0.975 x 2.385
=11.619m²>7.626m²(OK)




G/F SINGLE OCCUPANCY DIAGRAM

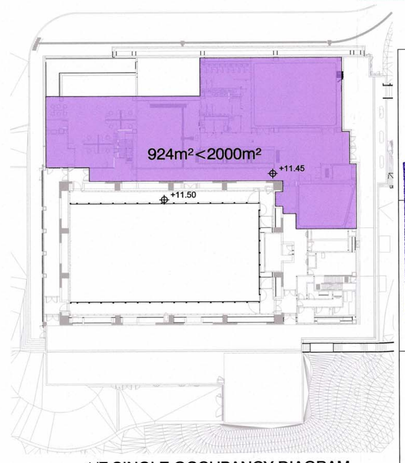


1/F SINGLE OCCUPANCY DIAGRAM

## LIST OF GFA CONCESSION (PNAP APP-151)

| | | PRACTICE NOTES | FEATURES SUBJECT TO COMPLIANCE WITH THE PRE-REQUISITES IN PARA. 6 & 7 OF PNAP APP-151 | FEATURES SUBJECT TO THE OVERALL CAP OF 10% IN PARA. OF PNAP APP-151 |
|---|---|---|---|---|
| DISREGARDED GFA UNDWE BUILDING (PLANNING REGULATIONS 23(3)(b) | | | | |
| 1 | CARPARK AND LOADING/UNLOADING AREA EXCLUDING PUBLIC TRANSPORT TERMINUS | PNAP APP-2 AND APP-111 | | |
| 2 | PLANT ROOMS AND SIMILAR SERVICES | | | |
| 2.1 | MANDATORY FEATURE OR ESSENTIAL PLANT ROOM, AREA OF WHICH IS LIMITED BY RESPECTIVE PNAP OR REGULATION, SUCH AS LIFT MACHINE ROOM, TBE ROOM, REFUSE STORAGE CHAMBER, ETC. | PNAP APP-35 & APP-84 | | |
| 2.2 | MANDATORY FEATURE OR ESSENTIAL PLANT ROOM, AREA OF WHICH IS NOT LIMITED BY ANY PNAP OR REGULATION, SUCH AS ROOM OCCUPIED SOLEY BY FSI AND EQUIPMENT, METER ROOM, TRANSFORMER ROOM, POTABLE AND FLUSHING WATER TANK, ETC. | PNAP APP-2 AND APP-42 | | |
| 2.3 | NON-MANDATORY OR NON-ESSENTIAL PLANT ROOM, SUCH AS A/C PLANT ROOM, AHU ROOM, ETC. | PNAP APP-2 AND APP-42 | ✓ | 243.347+65.487+65.123 (G/F) (2/F) (2/F) =373.960 s.m. |
| DISREGARDED GFA UNDER BUILDING (PLANNING REGULATIONS 23A(3) | | | | |
| 3 | AREA FOR PICKING UP AND SETTING DOWN PERSONS DEPARTING FROM OR ARRIVING AT THE HOTEL BY VEHICLE | PNAP APP-40 | | |
| 4 | SUPPORTING FACILITIES FOR HOTEL | PNAP APP-40 | | |
| GREEN FEATURES UNDER JPNs | | | | |
| 5 | BALCONY FOR RESIDENTIAL BUILDINGS | JPN1 | ✓ | ✓ |
| 6 | WIDER COMMON CORRIDOR AND LIFT LOBBY | JPN1 | ✓ | ✓ |
| 7 | COMMUNAL SKY GARDEN | JPN1 & 2 PNAP APP-122 | ✓ | |
| 8 | COMMUNAL PODIUM GARDEN FOR NON-RESIDENTIAL BUILDINGS | JPN1 | ✓ | |
| 9 | ACOUSTIC FIN | JPN1 | ✓ | |
| 10 | WING WALL, WIND CATCHER AND FUNNEL | JPN1 | ✓ | |
| 11 | NON-STRUCTURAL PREFABRICATED EXTERNAL WALL | JPN1 | ✓ | ✓ |
| 12 | UTILITY PLATFORM | JPN1 | ✓ | ✓ |
| 13 | NOISE BARRIER | JPN1 | ✓ | |
| AMENITY FEATURES | | | | |
| 14 | COUNTER, OFFICE, STORE, GUARD ROOM AND LAVATORY FOR WATCHMAN AND MANAGEMENT STAFF, OWNERS' CORPORATION OFFICE | PNAP APP-42 | ✓ | ✓ |
| 15 | RESIDENTIAL RECREATIONAL FACILITIES INCLUDING VOID, PLANT ROOM, SWIMMING POOL FILTRATION PLANT ROOM. COVERED WALKWAY ETC. SERVING SOLELY THE RECREATIONAL FACILITIES | PNAP APP-2, APP-42 AND APP-104 | ✓ | ✓ |
| 16 | COVERED LANDSCAPED AND PLAY AREA | PNAP APP-42 | ✓ | |
| 17 | HORIZONTAL SCREEN/COVERED WALKWAY, TRELLIS | PNAP APP-42 | ✓ | ✓* |
| 18 | LARGER LIFT SHAFT | PNAP APP-89 | ✓ | ✓ |
| 19 | CHIMNEY SHAFT | PNAP APP-2 | ✓ | ✓ |
| 20 | OTHER NON-MANDATORY OR ESSENTIAL PLANT ROOM, SUCH AS BOILER ROOM, SMATV ROOM | PNAP APP-2 | ✓ | ✓ |
| 21 | PIPE DUCT, AIR DUCT FOR MANDATORY FEATURE OR ESSENTIAL PLANT ROOM | PNAP APP-2 & APP-93 | | |
| 22 | PIPE DUCT, AIR DUCT FOR NON-MANDATORY OR NON-ESSENTIAL PLANT ROOM | PNAP APP-2 | ✓ | 17.869+91.805+1168.292 (G/F) (1/F) (2/F) =1277.966 s.m. |
| 23 | PLANT ROOM, PIPE DUCT, AIR DUCT FOR ENVIRONMENTALLY FRIENDLY SYSTEM AND FEATURE | PNAP APP-2 | ✓ | ✓ |
| 24 | HIGH HEADROOM AND VOID IN FRONT OF CINEMA, SHOPPING ARCADE ETC. IN NON-DOMESTIC DEVELOPMENT | PNAP APP-2 | 700.275 s.m. (MAINTENANCE DECK) | |
| 25 | VOID OVER MAIN COMMON ENTRANCE (PRESTIGE ENTRANCE) IN NON-DOMESTIC DEVELOPMENT | PNAP APP-2 & APP-42 | ✓ | ✓ |
| 26 | VOID IN DUPLEX DOMESTIC FLAT AND HOUSE | PNAP APP-2 | ✓ | ✓ |
| 27 | SUNSHADE AND REFLECTOR | PNAP APP-19 & APP-67 | | |
| 28 | MINOR PROJECTION SUCH AS AC BOX, WINDOW CILL, PROJECTING WINDOW | PNAP APP-19 & APP-42 | | |
| 29 | OTHER PROJECTION SUCH AS AIR-CONDITIONING BOX AND PLATFORM WITH A PROJECTION OF MORE THAN 750mm FROM THE EXTERNAL WALL | PNAP APP-19 | ✓ | ✓ |
| OTHER ITEMS | | | | |
| 30 | REFUGE FLOOR INCLUDING REFUGE FLOOR CUM SKY GARDEN | PNAP APP-2 & APP-122 | | |
| 31 | COVERED AREA UNDER LARGE PROJECTING/OVERHANGING FEATURE | PNAP APP-19 | | |
| 32 | PUBLIC TRANSPORT TERMINUS (PTT) | PNAP APP-2 | | |
| 33 | PARTY STRUCTURE AND COMMON STAIRCASE | PNAP ADM-2 | | |
| 34 | HORIZONTAL AREA OF STAIRCASE, LIFT SHAFT AND VERTICAL DUCT SOLELY SERVING FLOOR ACCEPTED AS NOT BEING ACCOUNTABLE FOR GFA | PNAP APP-2 | | |
| 35 | PUBLIC PASSAGE | PNAP APP-108 | | |
| 36 | COVERED SET BACK AREA | PNAP APP-152 | | |
| OTHER ITEMS | | | | |
| 37 | BONUS GFA | PNAP APP-108 | | |

## % OF GFA CONCESSION

= 1277.966 s.m. / 4427.252 s.m. = 28.87%

NOTE:
IN VIEW OF THE SPECIAL CIRCUMSTANCES OF THE CASE, THE FORM BA16 APPLICATION DATED 5 FEBRUARY 2015 TO PERMAIT EXEMPTION OF OVERALL CAP ON GFA CONCESSION FOR THIS SUBMISSION IS CONSIDERED ACCEPTABLE.
(BD APPROVAL LETTER DATED 17 FEBRUARY 2015 PARA 17(y) UNDER BD 2/4062/14 REFERS)

Arthur Au Kin-tung
Authorized Persons (List of Architects). Registered Architect

"STATEMENT II : The works shown on these plans are Type II works (~~, in respect of which the Building Authority's consent is applied for.~~)"


FOR OFFICE USE

Plan Approved
LI Ming-chan, Gordon
Senior Building Surveyor
for BUILDING AUTHORITY
23 AUG 2018

Note: This plan has been processed on a curtailed check basis under the centralized processing system as promulgated in PNAP ADM-19. The duties of the authorized person, registered structural engineer orr/or registered geotechnical engineer concerned as specified under section 4(3)(b) and the provision of section 14(2)(c) of the Buildings Ordinance are of particular relevance in this regard.

B.D. REF: BD 2/4062/14(P)
F.S.D. REF: FP 8/27927(D)/1

KEY PLAN

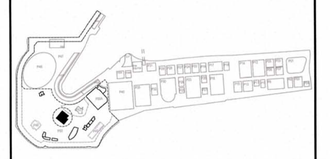

KEY PLAN

NOTES:

FOR BD APPROVAL

| REV. | DATE | DESCRIPTION | INITIAL |
|---|---|---|---|
| 03 | 25/05/18 | FINAL AMENDMENT | R.TANG |
| 02 | 07/06/17 | SECOND AMENDMENT | R.TANG |
| 01 | 22/04/16 | FIRST AMENDMENT | R.NG |
| 00 | 02/12/15 | FIRST SUBMISSION | R.NG |

LEAD CONSULTANT & ARCHITECT
DLN
Dennis Lau & Ng Chun Man Architects & Engineers (HK) Ltd.
46/F, Tower 1, Times Square, Matheson Street Causeway Bay Hong Kong

THEATRE PLANNING CONSULTANT
theatreplan
Theatreplan LLP
27 Colonnade, London WC1N 1JA United Kingdom

CIVIL, GEO-TECHNICAL, STRUCTURAL, BUILDING SERVICES & ENVIRONMENTAL ENGINEER
ARCADIS
Arcadis Design & Consultancy for Natural and Built Assets
20/F, AXA Tower,Landmark East 100 How Ming Street Kwun Tong, Kowloon Hong Kong

PROJECT LANDSCAPE ARCHITECT
ACLA
ACLA Limited
20/F, AXA Tower,Landmark East 100 How Ming Street Kwun Tong, Kowloon Hong Kong

PROJECT QUANTITY SURVEYOR
利比 RLB | Rider Levett Bucknall
Rider Levett Bucknall
20th Floor, Eastern Central Plaza, 3 Yiu Hing Road, Shaukeiwan, Hong Kong

JOB TITLE
THE PARK DEVELOPMENT FOR
THE WEST KOWLOON CULTURAL DISTRICT

DRAWING TITLE
FREESPACE
FREESPACE - DIAGRAMS AND CALCULATION 3

| | | | |
|---|---|---|---|
| SCALE | As indicated | PRINTED | A1 |
| CHECKED | BRUCE LAW | DATE | 09/04/18 |
| APPROVED | ARTHUR AU | DATE | 09/04/18 |
| DRAWN | R.TANG | DATE | 09/04/18 |

DRAWING NO. 3B51X - ARC - DWG - P00 - XXXX - 5002 - GBP
REV. 03

CAD REF NAME: 3B51X-ARC-BIM-0000-P00-XXXX-WS5_.rvt

AUTHORITY
westKowloon
西九文化區